


# INDOOR AIR QUALITY DATALOGGER



## CO<sub>2</sub>, HUMIDITY, TEMPERATURE DATALOGGER 77294/7729

- Large LED displays and record CO<sub>2</sub>, Humidity and Temperature readings simultaneously
- 12000 times auto logging. USB2.0 plug and play. No need to operate through specific software.
- Designed with high accuracy NDIR (non-dispersive infrared) waveguide technology CO<sub>2</sub> sensor
- 22cm long 3-color green, yellow and red LED light bar to indicate the CO<sub>2</sub> concentration level
- 77294: with datalogging 7729: without datalogging

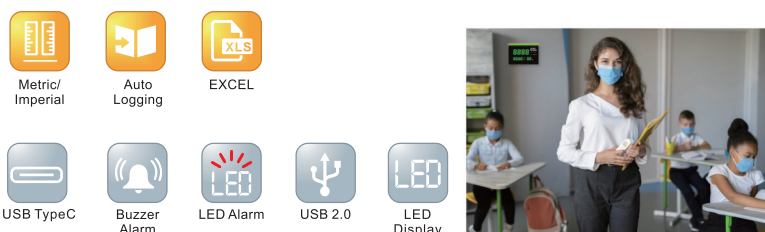

Best helper to increase your rating while applying **LEED** green building certificate



Table 2. Points for Continuous Indoor Air Monitoring

Parameter	Data requirement	Minimum limit	IAQ	Enhanced IAQ limit	Points*
Carbon dioxide (CO <sub>2</sub> )	95 <sup>th</sup> percentile value	1000 ppm	800 ppm	800 ppm	3 (minimum IAQ limit), 4 (enhanced IAQ limit)

By improving the CO<sub>2</sub> concentration indoor and providing continuous monitoring record, at most 4 points is added to your LEED rating.

Programmable air quality light bar indicator



For both Wall mount & Desktop



**Ordering Code**  
 VZ77294AZ, 77294 CO<sub>2</sub> logger with light bar  
 VZ7729AZ, 7729 CO<sub>2</sub> monitor with light bar  
 VB17729A, 5V USB adaptor with 4 plugs

\*Available for EB project

Model	77294/7729
<b>Measuring range</b>	
CO <sub>2</sub>	0~9999 ppm,
Temperature	-10.0~60.0 °C (14~140 °F)
Humidity	0.1~99.9% RH
Resolution	1ppm , 0.1 °C/°F, 0.1%RH
<b>Accuracy</b>	
CO <sub>2</sub>	±50ppm±5% of reading ( 0~2000ppm) Other range is 10% of reading
Temperature	±0.6 °C/±0.9 °F
Humidity	±5%RH ( at 25 °C, 10~90%RH ) ; ±7%RH ( at 25 °C , other range )
Warm-up time	10 seconds
<b>Response time</b>	
CO <sub>2</sub>	<30 seconds(90% step change)
Tair	<2 mins (90% step change)
Humidity	<20 minutes ( 90% step change)
Auto Logging	12000 times records, 77294 only
IP rating	IP20
Operating condition	0~50 °C , 0~95% RH (avoid condensation)
Storage condition	-20~ 50 °C, 0~95%RH(avoid condensation)
Power supply	5VDC USB type C port
Power consumption	<500mA
Meter size (LxWxH,mm)	226x 152 x 45
Weight	450g
Standard package	Meter, manual, Type C cable, Hanging accessories.
Optional accessory	100~240V to 5V@0.6A adaptor with 4 plugs (US.EU.UK. AU)

**Areas of application:** Widely used in the office building, school, exhibition hall, shopping mall, meeting room, fitness center, restaurant and other public places where **energy bill**, personal **comfort** and **healthy** are important.

